



**Millennium Power Manufacturing Corp.**

<http://www.mpmc-china.com>

**MMAS385-2(D2866LE203)**

**Generating set Technical Data Sheet**



NO:MADT200906053-01

© 2009 Millennium Power Manufacturing Corp.



**ISO9001:2000**  
MPMC GENERATING SETS



## STANDARD SPECIFICATION

### General features:

- Composed of MAN(Germany) diesel engine and Stamford or MPMC alternator
- 24V DC start motor and storage battery
- Brushless, Self-excited, IP23, insulation class H alternator
- Key start panel control system as standard, digital auto-start panel is optional
- 8-hour operation base tank
- Optional open type or silent type
- All generator sets are gone through rigorous testing before being released to the market place, including 50% load, 75% load, 100% load , 110% load and all protection function (overspeed stop, high water temperature, low oil pressure, battery charging fail, emergency stop)



### Genset Main Technical Data

**3-PH, 60Hz@1800RPM, 480/277V** (Also Can Be Made According To Customers' Special Requirements)

Genset Model	Genset Specification					Engine Specification				Alternator Model
	kW		Cons. 100% (L/H)	dB(A) @7m	Tank (L)	Model	Cyl.	Gov.	Asp.	
	ESP	PRP								
MMAS385-2	385	350	93.3	N/A	800	D2866LE203	6	E	TCA	HCI 444E
MMAS385S-2	385	350	93.3	80	900	D2866LE203	6	E	TCA	HCI 444E
MMAM385-2	385	350	93.3	N/A	800	D2866LE203	6	E	TCA	MPA 314D
MMAM385S-2	385	350	93.3	80	900	D2866LE203	6	E	TCA	MPA 314D

1) Available in various voltages

2) To show MPMC Generating Sets Model

For example: MCM38-1A, it is the open generation set.

MCM38S-1A, it is the silent generating set.

3) ESP=Standby power standby duty, operation under variable load, without overload

PRP=Prime power continuous duty operation, under variable load, 10% overload permissible 1/12hr

4) E=Electronic speed governor;

M=Mechanical speed governor

5) Asp=Aspiration;

NA=Naturally Asp;

TC=Turbocharged;

TW=Turbocharged after water-cooled;

TCA= Turbocharged air intercooler

6) Technical data is subject to work test conditions

## Reliable Performance

### Voltage regulation

Voltage regulation maintained within  $\pm 0.5\%$  as follow:

- Power factor Between 0.8~1.0 lag
- From no load to full load, any steady load
- Speed droop variation under 4.5%

### Frequency/Speed undulation

- Change load from 0-100%, Frequency/Speed Droop Ratio within 5%
- Load from 25-100%, any steady load Frequency/Speed undulation within 0.25%


### Effect factor of telecom

- TIF( MA MG1-22) better than 50
- THF( BS EN60034) better than 2%

## Criterion

- ISO8528, GB/T2820
- EN12601:2001, EN60034-22:1997, EN60204-1:2006
- ISO9001:2000 Quality Control System


## Dimension and Weight

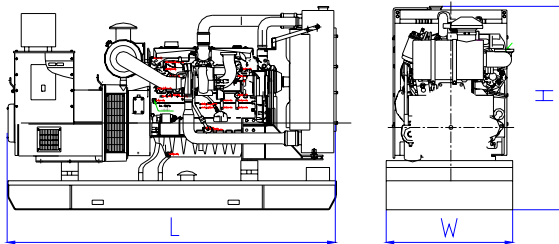

### Open Type

Overall size (L\*W\*H)  
3100×1200×1850

Weight: 2600kg

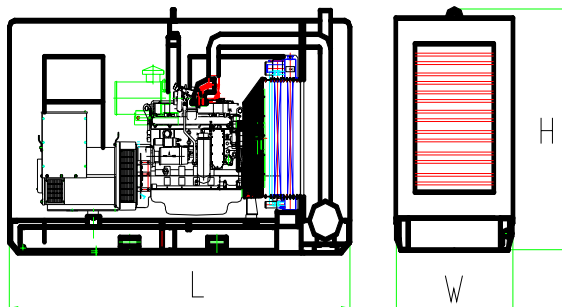

### Silent Type

Overall size (L\*W\*H)  
4200×1400×2380

Weight: 4000kg

## ENGINE SPECIFICATION

### MAN (Germany) Diesel Engine

#### Technical Data

Engine Model	D2866LE203
Number of Cylinders	6
Cylinder arrangement	In Line
Cycle	Four stroke
Aspiration	Turbocharger, intercooler
Bore×Stroke (mm×mm)	128 x 155
Displacement (Liter)	16.9671
Compression Ratio	15.5:1
Prime Power/Speed (kW/rpm)	400/1800
Standby Power/Speed (kW/rpm)	440/1800
Speed Governor	Electrical
Cooling System	Water-cooled
Speed Stability (%)	≤5%
Total lubrication system capacity (L)	40
Coolant capacity ( inc. radiator) (L)	48.3
Fuel Consumption at 100% Load (g/kWh)	204 (at 1800RPM)
Starter Motor	DC24V,
Alternator	AC24V

## Alternator SPECIFICATION

### Stamford Alternator (Standard)

### MPMC Alternator (Option)

#### Technical Data

Alternator Model	UCI XXXX (Stamford) MPA XXXX(MPMC) Please Refer To The “ Genset Main Technical Data”
Exciter type	Brushless, Self-excited
Power factor	0.8
Voltage Adjust range	≥5%
Voltage Regulation NL-FL	≤±0.5%
Insulation Grade	H
Protection Grade	IP23

## Control System

### 1. Standard: MP170HC Key Start

Providing the standard functions as follows:

(Also can be made according to the customers' special requirements)

- \* Start/Stop controller
- \* Ampere meter
- \* Voltmeter and selector switch
- \* Frequency meter/ Water temperature gauge/ Oil pressure gauge/  
Hour counter/ Battery voltage meter
- \* Emergency stop pushbutton
- \* Alarm System: Over speed、High Engine Temperature  
Low Oil Pressure、Charge Fail
- \* Protection System: Over speed、High Engine Temperature、Low Oil  
Pressure、Emergency Stop. And the other protection function  
pre-setting

### 2. Option: Smartgen HGM6110 Digital Auto Start

### 3. Option: Smartgen HGM6120 Digital Auto Start (Option assembled with the ATS)

### 4. Option: Deep Sea DSE5210 Digital Auto Start

### 5. Option: Deep Sea DSE5220 Digital Auto Start (Option assembled with the ATS)

Digital Auto-start Generator controller integrating digital, intelligent and network techniques is used for automatic control system of diesel generator. It can carry out functions including automatic start/stop, data measure and alarming. Optionally assembled with the ATS, it can carry out auto-switching between the outer power and generating set power. (AMF)

#### Functions:

- \* Automatic Start/Stop
- \* 3 start attempts failure and Automatic Crank Disconnect
- \* Parameters display (V/A/Hz/Hour)
- \* Engine monitoring and protection
- \* Charge alternator exciting and Charge alternator fail alarm
- \* Running hour counting
- \* Settings can be adjustable via key buttons on front panel

### 6. option: BGC-L

(Main used in Multiple gen-sets, load sharing)



(1)



(2)



(3)



(4)



(5)



(6)