



**Millennium Power Manufacturing Corp.**

*<http://www.mpmc-china.com>*

**MVS300-2(TAD941GE)**

**Generating set Technical Data Sheet**



NO:VDT200906058-01

© 2009 Millennium Power Manufacturing Corp.



**ISO9001:2000**  
MPMC GENERATING SETS



## STANDARD SPECIFICATION

### General features:

- Composed of Volvo diesel engine and Stamford or MPMC alternator
- 24V DC start motor and storage battery
- Brushless, Self-excited, IP23, insulation class H alternator
- Engine cooling system: water-cooled
- Key start panel control system as standard, digital auto-start panel is optional
- 8-hour operation base tank
- Optional open type or silent type
- All generating sets are gone through rigorous testing before being released to the market place, including 50% load, 75% load, 100% load , 110% load and all protection function (overspeed stop, high water temperature, low oil pressure, battery charging fail, emergency stop)



### Genset Main Technical Data

**3-PH, 60Hz@1800RPM, 480/277V** (Also Can Be Made According To Customers' Special Requirements)

Genset Model	Genset Specification					Engine Specification				Alternator Model
	kW		Cons. 100% (L/H)	dB(A) @7m	Tank (L)	Model	Cyl.	Gov.	Asp.	
	ESP	PRP								
MVS300-2	300	273	73.1	N/A	N/A	TAD941GE	6	E	TC	HCI 444D
MVS300S-2	300	273	73.1	75	N/A	TAD734GE	6	E	TC	HCI 444D
MVM300-2	300	273	73.1	N/A	N/A	TAD734GE	6	E	TC	MPA 314C
MVM300S-2	300	273	73.1	75	N/A	TAD734GE	6	E	TC	MPA 314C

1) Available in various voltages

2) To show MPMC Generating Sets Model

For example: MCM38-1A, it is the open generation set.

MCM38S-1A, it is the silent generating set.

3) ESP=Standby power standby duty, operation under variable load, without overload

PRP=Prime power continuous duty operation, under variable load, 10% overload permissible 1/12hr

4) E=Electronic speed governor;

M=Mechanical speed governor

5) Asp=Aspiration;

NA=Naturally Asp;

TC=Turbocharged;

TW=Turbocharged water-cooled;

TCA= Turbocharged air-air cooled

6) Technical data is subject to work test conditions

## Reliable Performance

### Voltage regulation

Voltage regulation maintained within  $\pm 0.5\%$  as follow:

- Power factor Between 0.8~1.0 lag
- From no load to full load, any steady load
- Speed droop variation under 5%

### Frequency/Speed undulation

- Change load from 0-100%, Frequency/Speed Droop Ratio within 5.0%
- Load from 25-100%, any steady load Frequency/Speed undulation within 0.25%


### Effect factor of telecom

- TIF( MA MG1-22) better than 50
- THF( BS EN60034) better than 2%

## Criterion

- ISO8528, GB/T2820
- EN12601:2001, EN60034-22:1997, EN60204-1:2006
- ISO9001:2000 Quality Control System


## Dimension and Weight

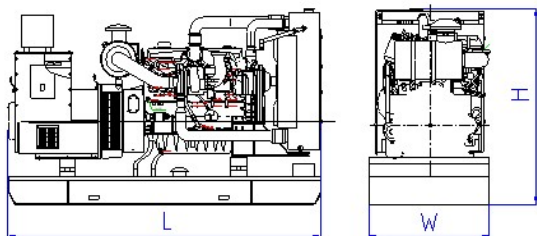

### Open Type

Overall size (L\*W\*H)  
3000×1200×1800

Weight: 2900kg

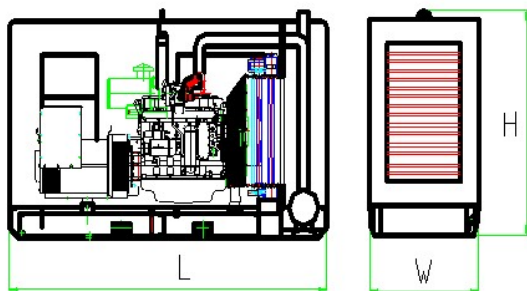

### Silent Type

Overall size (L\*W\*H)  
4000×1400×2050

Weight: 3800kg

## ENGINE SPECIFICATION

### Volvo Diesel Engine

#### Technical Data

Engine Model	TAD941GE
Exhaust emissions complies with	EU Stage 2
Number of Cylinders	6
Cylinder arrangement	Vertical in-line
Cycle	Four stroke
Aspiration	Turbocharged
Bore×Stroke (mm×mm)	120 x 138
Displacement (Liter)	9.36
Compression Ratio	17.4:1
Prime Power/Speed (kW/rpm)	296/1800
Standby Power/Speed (kW/rpm)	326/1800
Speed Governor	Electrical
Cooling System	Water-cooled
Residual speed droop at load increase form 0 to 100%	≤5%
Total lubrication system capacity (L)	35
Coolant capacity (inc. radiator) (L)	41
Fuel Consumption at 100% Load (g/kWh)	205(at 1800RPM)
Starter Motor	24 V
Alternator	24 V

## Alternator SPECIFICATION

### Stamford Alternator (Standard)

### MPMC Alternator (Option)

#### Technical Data

Alternator Model	HCI XXXX (Stamford) MPA XXXX(MPMC) Please Refer To The “ Genset Main Technical Data”
Exciter type	Brushless, Self-excited
Power factor	0.8
Voltage Adjust range	≥5%
Voltage Regulation NL-FL	≤±0.5%
Insulation Grade	H
Protection Grade	IP23

## Control System

### 1. Standard: MP170HC Key Start

Providing the standard functions as follows:

(Also can be made according to the customers' special requirements)

- \* Start/Stop controller
- \* Ampere meter
- \* Voltmeter and selector switch
- \* Frequency meter/ Water temperature gauge/ Oil pressure gauge/ Hour counter/ Battery voltage meter
- \* Emergency stop pushbutton
- \* Alarm System: Over speed、High Engine Temperature  
Low Oil Pressure、Charge Fail
- \* Protection System: Over speed、High Engine Temperature、Low Oil Pressure、Emergency Stop. And the other protection function pre-setting

### 2. Option: Smartgen HGM6110 Digital Auto Start

### 3. Option: Smartgen HGM6120 Digital Auto Start

(Option assembled with the ATS)

### 4. Option: Deep Sea DSE5210 Digital Auto Start

### 5. Option: Deep Sea DSE5220 Digital Auto Start

(Option assembled with the ATS)

Digital Auto-start Generator controller integrating digital, intelligent and network techniques is used for automatic control system of diesel generator. It can carry out functions including automatic start/stop, data measure and alarming. Optionally assembled with the ATS, it can carry out auto-switching between the outer power and generating set power. (AMF)

#### Functions:

- \* Automatic Start/Stop
- \* 3 start attempts failure and Automatic Crank Disconnect
- \* Parameters display (V/A/Hz/Hour)
- \* Engine monitoring and protection
- \* Charge alternator exciting and Charge alternator fail alarm
- \* Running hour counting
- \* Settings can be adjustable via key buttons on front panel

### 6. option: BGC-L

(Main used in Multiple gen-sets, load sharing)



(1)



(2)



(3)



(4)



(5)



(6)